



## Canned motor pumps for server room cooling

Given the explosive growth in web hosting and cloud computing, data servers are playing an increasingly important role in business and society. The reliability of the servers in the sensitive areas of banks, insurance companies, authorities and large companies is particularly critical. This requires cooling systems of increasing size to dissipate the heat generated in the server rooms. The classic cooling medium air is increasingly being replaced by water and other natural refrigerants such as CO<sub>2</sub> or NH<sub>3</sub>.

Besides safety aspects and special requirements for handling natural refrigerants, system efficiency and environmental aspects also play an important role. HERMETIC supports system manufacturers and server room operators with hermetically sealed canned motor pumps that perfectly combine safety, efficiency and environmental protection.

### Your benefits

- Safety: Absolute leak-tightness of the system even when using coolants with high requirements such as ammonia or CO<sub>2</sub>
- Pressure resistance: High operating pressures can be achieved when using CO<sub>2</sub>
- Compact design: Low NPSH values for compact system construction

### Typical areas of application

- Server room cooling



# Server room cooling in France


## Requirements

For a server room installed in France, the refrigerant CO<sub>2</sub> was chosen for space reasons. In this case, the volumetric flow rate is 12 m<sup>3</sup>/h, while using air would have required about 5000 m<sup>3</sup>/h and water about 100 m<sup>3</sup>/h. However, with the use of CO<sub>2</sub>, more stringent requirements had to be met, particularly regarding leak-tightness and operating pressure. For example, the cooling system components must both meet the high leak-tightness requirements and withstand a system pressure of at least 64 bar. Also, higher demands are placed on the lubrication / wear resistance of the components. For safety reasons, pressure resistance of up to 74 bar was also required should a power failure happen.

## The pump used

The system employs a HERMETIC canned motor pump CAM 30 that meets the high expectations of performance, reliability and leak-tightness and perfectly fits the physical conditions of CO<sub>2</sub>. For example, the maximum CO<sub>2</sub> leakage rate is less than 1 g/year at 64 bar system pressure. Innovative materials, especially for the seals used, ensure excellent pressure resistance. The special design of the pump in a so-called "tandem version" ensures reliable motor cooling and ventilation. The implementation was quick and solution-oriented thanks to the many years of experience of HERMETIC-Pumpen GmbH in complex applications in the oil & gas, chemical and refrigeration technology sectors.

Further information on the HERMETIC CAM 30 series is available [here](#).

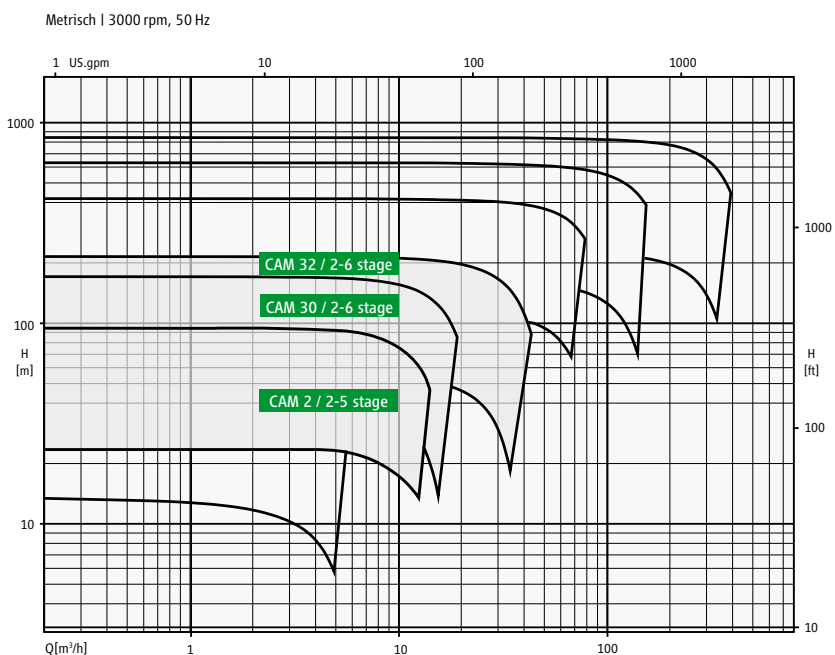

## Medium / refrigerant

Carbon dioxide is increasingly used as a refrigerant. Particularly popular are super-market refrigeration and industrial refrigeration systems. CO<sub>2</sub> is used in different forms, subcritical in cascade systems, transcritical in pure CO<sub>2</sub> systems or as a secondary fluid. The advantages of carbon dioxide are the particularly good heat transfer coefficient, exceptionally low viscosity and high environmental compatibility.

Everything you need to know about CO<sub>2</sub> is available [here](#).

### We have the right pumps for your industry



**CAMh**



**CNF**



**CAM(R)**

Delivery rate:	max. 14 m <sup>3</sup> /h	max. 80 m <sup>3</sup> /h	max. 40 m <sup>3</sup> /h
Pumping head:	max. 120 m	max. 70 m	max. 180 m <sup>3</sup> /h
Pressure rating:	PN52	PN25 and PN40	PN25 and PN40
Operating temperature:	-50 °C to +5 °C	-50 °C to +30 °C	-50 °C to +30 °C
Speed:	2800 to 3500 rpm	2800 to 3500 rpm	2800 to 3500 rpm
Viscosity:	max. 20 mm <sup>2</sup> /s	max. 20 mm <sup>2</sup> /s	max. 20 mm <sup>2</sup> /s

[Learn more](#)

[Learn more](#)

[Learn more](#)

## Customisations

If you cannot find a suitable pump series? We are happy to help you with a customised solution regardless of the quantity. Please contact us.

[Contact now](#)



HERMETIC-Pumpen GmbH  
79194 Gundelfingen, Germany  
[www.hermetic-pumpen.com](http://www.hermetic-pumpen.com)  
[cool-support@hermetic-pumpen.com](mailto:cool-support@hermetic-pumpen.com)